

V O L V O



Volvo Tracked Pavers 1.5-4.5 m 55.4 kW

**P2820D ABG**

Volvo Construction Equipment



# Unrivalled versatility

Go where other pavers cannot with the new generation P2820D ABG tracked paver. The most compact paver in the Volvo line-up, this machine is equipped with all the industry leading features of its larger counterparts but designed to deliver unrivalled versatility in small-to-medium paving applications.

## All-around talent

Whether accessing narrow jobsites or quickly completing patching work, the P2820D ABG is a talented all-rounder. Flexible configurations, such as individually operated hopper wings and electro-hydraulic foldable roof, enable you to take on a wider range of paving jobs.



## One machine, multiple solutions

The strong P2820D ABG can push a feed truck, while the 9-tonne capacity hopper can also easily be fed by other machinery. Choose between the dual conveyor or the single conveyor, which is unique to Volvo in this size-class and designed to deliver higher output per hour. Proportional conveyor and auger control comes as standard.



## Easy to transport

The paver is small enough to be transported alongside a compactor on the same transport vehicle without disassembling the screed extensions and end-gates, when fitted with a VB40 screed.



## Efficiency at work

Pave for longer without needing to stop for refueling. The efficient Volvo engine and perfectly matched hydraulics deliver the same best-in-class drive system you would expect from the larger Volvo ABG pavers.







# MADE FOR THE CITY

Low noise and low emissions make the P2820D ABG the perfect choice when working in inner-city environments. Respecting the local environment is key when working in built-up areas and the low-noise screed contributes to an impressively quiet operation. When it comes to air quality, the efficient 55kW engine delivers low fuel consumption and low CO<sub>2</sub> emissions.



# The operator's choice

The P2820D ABG is designed with operators in mind, including many of the state-of-the-art features you would expect to find on larger Volvo ABG pavers. With a fully customizable workstation, easy-to-use controls and superior visibility, you can count on the machine to keep operators comfortable and productive throughout their entire working shift.

## Get straight to work

Get to work without delay thanks to Settings Manager, integrated within EPM3, allowing operators to store and retrieve customized settings for individual projects. A fast heating screed, up to 3°C per minute, further supports a fast and hassle-free machine setup.



## All weather protection

Operators stay protected whatever the weather, thanks to the all-weather roof which provides built-in sound insulation and sliding extensions which cover the operator even when the seat is extended. An optional glazed area to both sides of the operator platform provides further wind protection.



## Tailor-made comfort

For a truly personal level of comfort, operators can customize their working position and switch from sitting to standing within seconds. The control panel is capable of sliding across to both sides of the paver as a complete unit, and tiltable 30-degrees in all directions.



## Convenient storage

Safely and securely store the paving panel and screed console within the machine, allowing the operator to leave empty-handed at the end of a working shift. The new storage areas are located under the weather roof and at screed level, and for even further convenience everything is locked/unlocked with the ignition key.





# TOTAL OPERATOR CONTROL

The Electronic Paver Management (EPM3) system from Volvo is renowned for its operator friendly controls. The convenient layout intuitively guides operators through individual working functions, with the jog-wheel used to quickly select and adjust functions. With a workstation in common with larger Volvo ABG pavers, this is a machine which operators will instantly feel at home in.



# The need for screed

Unlock the full performance of your paver with a Volvo screed, delivering outstanding paving versatility and a smooth, high quality finished surface. Pave with ease thanks to a host of advanced features built on generations of experience from Volvo ABG, helping you to achieve superior paving results.

## Variomatic VB30 screed

The VB30 tamping and vibrating screeds feature the robust screed guide system, hydraulic screed crown, and extend to double the basic width (1.5m-3.0m). Screed extensions can be fitted to increase the paving width even further up to 4.0m.



## Smarter end-gate control

With hydraulically-controlled end-gates you eliminate the need for manual adjustments. This optional feature keeps operators safely away from traffic and reduces the time required to ensure a clean side finish. The hydraulic end-gates are no thicker than the manual option, with the slim design leaving less uncompacted material within the screed.



## Have it your way

The newly designed screed console can be tilted and rotated in any direction, allowing the operator to easily position it according to the requirements of the jobsite and their personal preferences. The new button layout is further optimized for greater convenience and ease of operation.





# NEW VB40 SCREED

With the new VB40 screed you can pave up to a 4.5m width. The screed features a tiltable walkway, mechanical or hydraulic screed crown and zero-daily maintenance with lifetime lubricated tamper and vibration bearings. Two possible screed extensions are available: 52.5 cm and 27.5 cm, with the latter allowing machine transportation without disassembling extensions and end-gates.



# Keep on paving

When it comes to successful operations, uptime is key and you can count on the P2820D ABG to keep working harder, for longer. The machine is also designed for quick and easy routine maintenance to keep scheduled downtime to a minimum.

## Easy after-treatment

The after-treatment system consists of Diesel Particulate Filter only, meaning there is no SCR and Adblue requirements. This eliminates both the need to replace diesel exhaust fluid and the need for SCR maintenance, helping to keep uptime to a maximum and lower machine running costs.



## Quick track pad changes

With bolts conveniently located inside the tracks, it's now quicker and easier to change track pads.



## Easy machine monitoring

With CareTrack you can access a full portfolio of telematics reports, including productivity, health and fuel efficiency, to stay one step ahead of machine condition and performance. Working independently or with the support of your Volvo dealer, you can use data to minimize the risk of unplanned downtime and ensure your machine is performing at its best.



## On the right track

Building on the success of the previous generation, the P2820D ABG features a range of undercarriage improvements, including 150mm increase in length for better balance and traction, and durable track scrapers for a smoother surface finish. For increased uptime and lower operating costs, the undercarriage includes an auto-track tensioner – a feature unique to Volvo in this class.







# MAINTAINING UPTIME

Complete routine maintenance with speed and ease thanks to a range of features such as drain hoses for fluids, easy battery access with external panel for jump starting and only three lubricating points for the whole machine. The conveyor also has lifetime lubricated, maintenance-free bearings.


# Compact machine, big versatility

## All-around talent

- Quiet and clean: low noise, low emissions
- Single or dual conveyor configurations
- Individually operated hopper wings
- 9-tonne hopper capacity
- 110-liter fuel tank capacity

## On the right track

- 150mm longer undercarriage
- Auto track tensioner
- Durable track scrapers
- Relocated bolts, for quicker track pads change

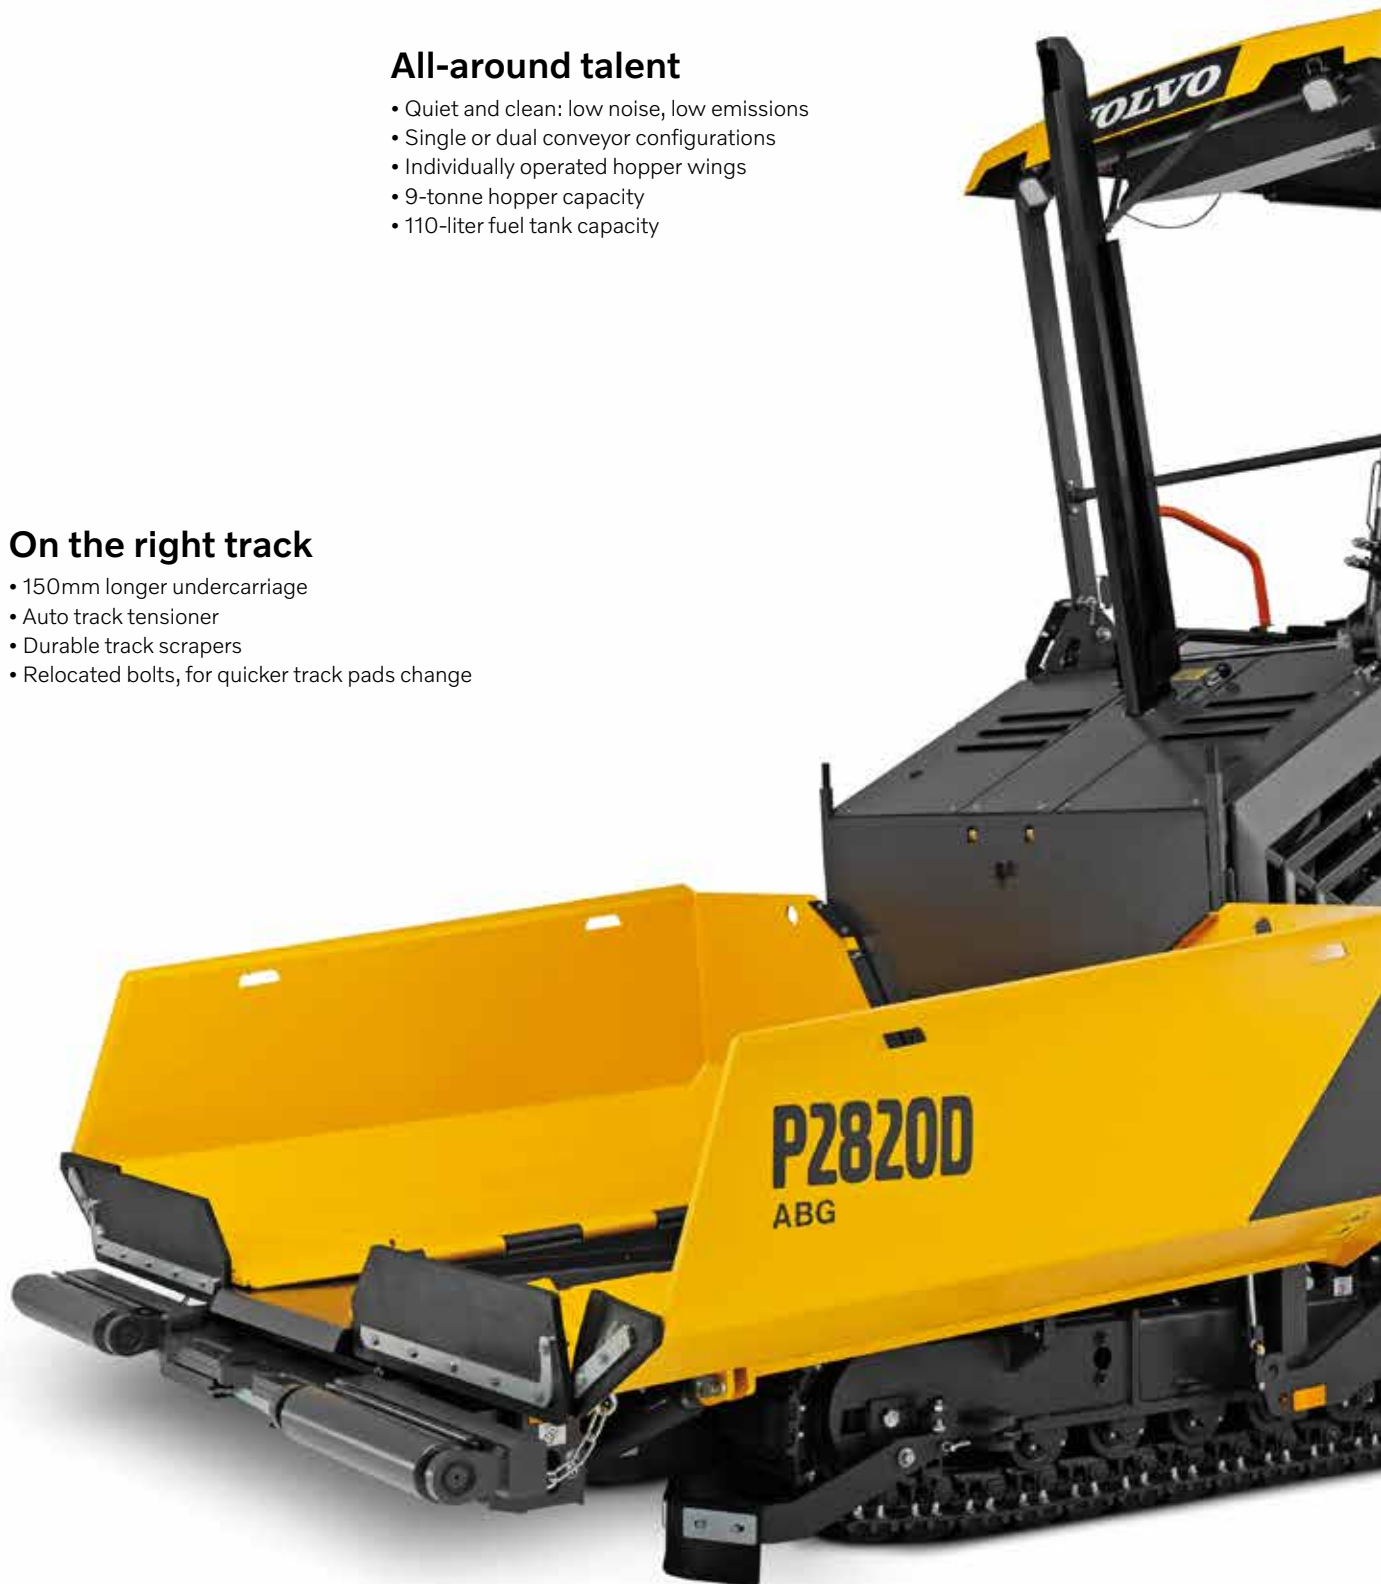



## Comfort and convenience

- Fully adjustable operator station
- All-weather roof, optional side glazed areas
- New storage areas
- EPM3: intuitive controls, from bigger pavers



## High uptime, lower costs

- Easy battery access, with external panel for jump starting
- 3 lubricating points, low daily maintenance
- Maintenance-free bearings for conveyor
- Diesel Particulate Filter with no SCR and no AdBlue
- CareTrack telematics system

## The need for screed

- New VB40 screed: pave up to 4.5 meters
- Variomatic VB30 screed: 1.5 to 4 meters
- Slim hydraulically controlled end-gates
- Fully adjustable screed console

# Volvo P2820D ABG in detail


<b>Engine</b>		
Manufacturer		Volvo
Model		D3.8H
Fuel		Diesel
Output	kW	55.4
	hp	75.3
at engine speed	r/min	2 200
Coolant		Liquid
Fuel tank capacity	l	110
Exhaust emission		EU Stage V
<b>Paving</b>		
Output (theoretical)*	t/h	330 with single conveyor 230 with double conveyor
Mat thickness	mm	250
<b>Speed</b>		
Paving (max)	m/min	20
Transport (max)	km/h	4.5
<b>Undercarriage</b>		
Length	mm	1 833
Width (track plates)	mm	160
<b>Conveyor</b>		
Hopper capacity	t	9
Number of conveyors		1 or 2
Conveyor speed (max)	m/min	17.9
<b>Auger</b>		
Number of augers		2
Speed (max)	1/min	72
Diameter	mm	300
<b>Electrical system</b>		
Battery voltage	V	24
<b>Dimensions</b>		
Length with VB40 screed (Walkway up)	mm	4 871
Length with VB30 screed	mm	5 300
Width	mm	1 740
Height	mm	3 994
Height (transport)	mm	2 899
<b>Weight**</b>		
Tractor unit	kg	8 155
<b>Max. allowable gradeability***</b>		
Tractor unit + screed	%	36
<b>Sound Level</b>		
Driver's ear, according to ISO 11201		
L <sub>pA</sub>	dB	85
Guaranteed sound power level according to ISO 6395 / Directive 2000/14/EC		
L <sub>WA</sub>	dB	106
<b>Vibration</b>		
Hand-Arm vibration according to ISO 5349:2001	m/s <sup>2</sup>	<2.5
Whole Body vibration according to ISO 2631:1997	m/s <sup>2</sup>	<0.5
<b>Notes</b>		
*The actual paving output depends upon mat thickness, paving width and paving speed, and will vary according to conditions prevailing on your jobsite. We can assist you in calculating the paving output for a specific project.		
**Approximative weight, without options. Diesel tank half-full, 75 kg operator, standard hopper and weather roof included.		
***When using extensions the maximum allowable gradeability will be reduced.		



# Specifications

## DIMENSIONS

Description	Unit	P2820D ABG
A Operating length	mm	5 300
B <sub>1</sub> Operating height	mm	3 995
B <sub>2</sub> Height weather roof	mm	3 720
B <sub>3</sub> Shipping height	mm	2 899
C Tractor width	mm	1 740
D <sub>1</sub> Height railing	mm	2 523
D <sub>2</sub> Deck height	mm	1 493
D <sub>3</sub> Screed height	mm	877
E <sub>1</sub> Outer hopper width	mm	3 240
E <sub>2</sub> Inner hopper width	mm	3 103
E <sub>3</sub> Width oscillating beam	mm	2 559
F <sub>1</sub> Extension weather roof	mm	580
F <sub>2</sub> Seat console extension	mm	542
G <sub>1</sub> Inner loading height	mm	552
G <sub>2</sub> Outer loading height	mm	701
H <sub>1</sub> Hopper length to push roller	mm	1 985
H <sub>2</sub> Hopper length	mm	1 805
J <sub>1</sub> Distance rear wall auger centre	mm	225
J <sub>2</sub> Distance auger screed	mm	230
J <sub>3</sub> Screed depth	mm	850
K <sub>1</sub> Auger height to ground (center)	mm	350-90
K <sub>2</sub> Diameter auger	mm	300
L Ground clearance	mm	145
M Diameter wheel	mm	-
N Diameter push roller	mm	110
O Conveyor width	mm	710
S <sub>1</sub> Basic screed width VB30	m	1.5
S <sub>1</sub> Basic screed width VB40	m	1.8
S <sub>2</sub> Extended screed width VB30	m	3.0
S <sub>2</sub> Extended screed width VB40	m	3.5
T <sub>1</sub> Front wheel/track to push roller	mm	960
T <sub>2</sub> Distance front wheels	mm	-
T <sub>3</sub> Track length/wheel base	mm	1 833
T <sub>4</sub> Track/wheel distance to rear wall	mm	589
U <sub>1</sub> Wheel/track gauge wheels/ tracks centre to centre	mm	1 150
U <sub>2</sub> Track pad width/wheel width	mm	260
W <sub>1</sub> Width of walkway	mm	300
W <sub>2</sub> Height of walkway	mm	295

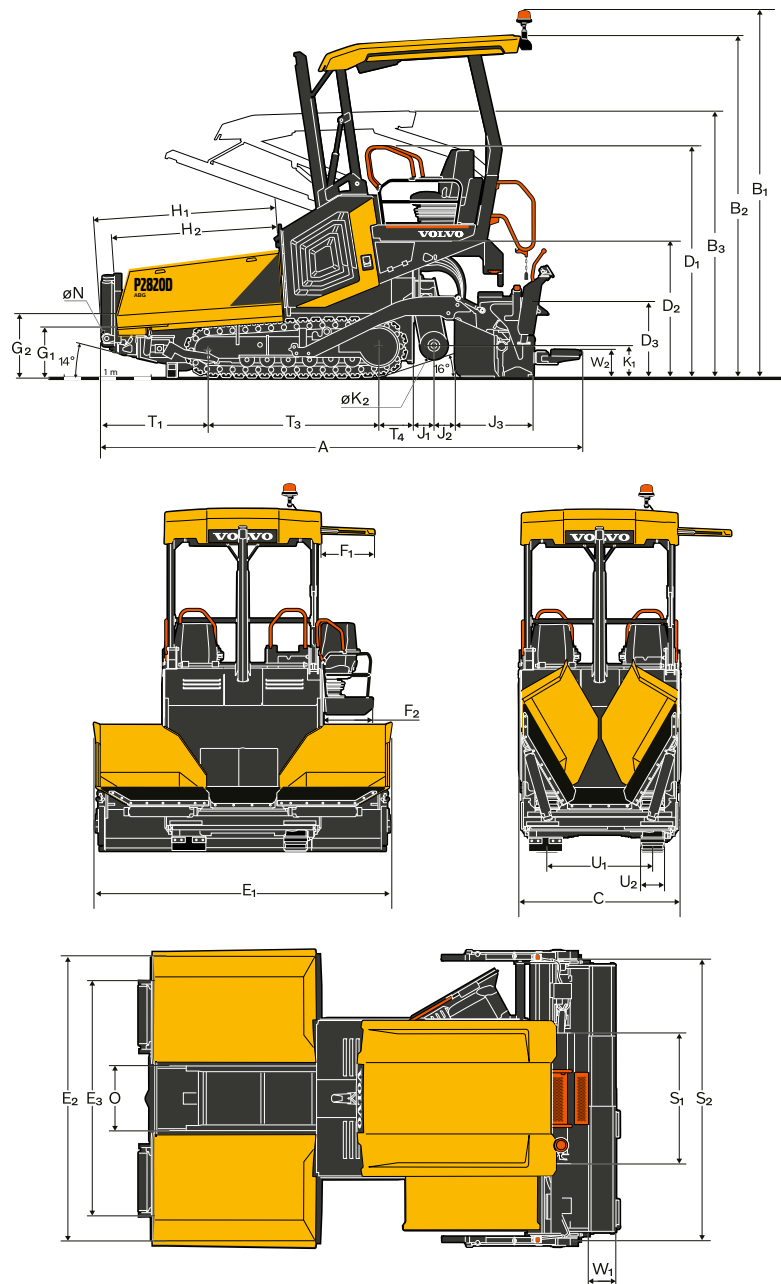

## OPERATING WEIGHT<sup>1</sup> OF SCREED IN KG

At working width	3.0 m	3.5 m	4.0 m	4.5 m
VB 40 ETC min	-	1 638	1 977	2 186
Mechanical crown control and standard end-gates	-	1 720	2 058	2 267
VB 40 ETC max	-	1 720	2 058	2 267
Hydraulic crown and hydraulic end-gates	-	1 720	2 058	2 267
VB 30 ETC min	1 856	-	2 260	-
VB 30 ETC max	1 873	-	2 277	-

<sup>1</sup> Including auger extensions, channel plates, end-gates.

# Equipment

STANDARD EQUIPMENT
<b>Engine</b>
Volvo diesel engine EU stage V
<b>Drive</b>
Electronic drive control
Load dependent efficient drive system
Automatic track tensioner
Lifetime lubricated crawler track rollers
Forged and hardened crawler track links
Smart rubber pads
<b>Material Management</b>
Proportional conveyor control
Reversible direction of auger rotation
Single conveyor
Mechanical auger height adjustment
Oscillating cross beam with two mounting positions
110 mm Push roller
<b>Electronics</b>
Electronic Paver Management (EPM 3)
Settings Manager
Service interval manager
Adjustable and slideable control station
Two adjustable and revolving screed control panels
Battery master switch
Electric switching cabinet
Back-up alarm
Tool kit
MATRIS support
<b>Structure</b>
Manual folding all-weather roof Glass-fibre Reinforced Plastic (GRP)
Two swing out seats
Storage compartment under weather roof
Near field mirrors at weather roof
Volvo Green Key
<b>Screed</b>
VB 30 ETC 1.50 - 3.0
Mechanical crown adjustment
Screed lock
Split towing arms
<b>Lights</b>
Work lights
Operator's platform lighting
Home light function
<b>Environmental</b>
Sound insulation für engine compartment and operator station

OPTIONAL EQUIPMENT
<b>Material Management</b>
Two Independent conveyors
Reversible conveyor
Individual operating hopper wings
Mechanically operated front apron
Hydraulically operated front apron
Push-roller D110 plus 100 mm more space
Proportional ultrasonic auger control
<b>Electronics</b>
Lateral emergency stop
Additional socket 230V 50Hz
Traction isolator switch
CareTrack GSM / Satellite
Levelling equipment
Case for control panels
<b>Structure</b>
Deluxe seats with heating and USB charger
Electrohydraulic powered weater roof
Seat side windshield
Without Weather Roof
<b>Screed</b>
Screed anti-climbing lock
Screed Assist
Hydraulic end-gates (VB 40)
Hydraulic heated end-gates (VB 40)
Hydraulic crown adjustment
Paving width reduction
Edging shoes 3/5/7/12 cm
<b>Lights</b>
Worklights LED
Two additional rear lights LED
Additional auger light LED
Additional lights levelling scale LED
Portable worklight LED with magnetic base
Warning beacon LED
<b>Environmental</b>
Extractor for bituminous fumes
Integrated emulsion spraying system with hose reel
High performance spray cleaning unit
Biodegradeable hydraulic oil and Bypass filter



## SELECTION OF VOLVO OPTIONAL EQUIPMENT

Electro-hydraulically foldable roof



Choice of single or dual conveyor



Hydraulic crown control



Storage area at screed level



Lateral emergency switch



LED light packages



Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

**V O L V O**